



# SAGA ROOFING SYSTEMS

*Sheltering Malaysian Homes*



## Lagenda

modern & harmonic aesthetic  
to suit all housing designs

### COLOUR GUIDE FOR LAGENDA



Xprexo  
- LG/XP1



Saga red  
- LG/SR2



Copper  
- LG/CP3



Persimmon  
- LG/PS4



Pewter  
- LG/PW5

\* The color shown here are reproduced as close to the original as printing technology allow.



CERT TO : MS 2596-1 : 2014  
CERT NO : PC010953

SAGA ROOFING SYSTEMS SDN. BHD.

Wisma Jeram Saga, 2-01, Puchong Square, Jalan Layang-Layang 5,  
Bandar Puchong Jaya, 47170 Puchong, Selangor D.E, Malaysia.  
+603 - 58809903 (H/L) +603 - 58809930 (Fax)  
sagarooftingsystems@gmail.com

# Marina

relaxing sea wave profile  
with enhanced water  
tightness

## COLOUR GUIDE FOR MARINA



Midnight  
- MR/MN1



Classic Red  
- MR/CR2



Woodland Brown  
- MR/WB3



Sunrise  
- MR/SR4




Slate Grey  
- MR/SG5



CERT TO : MS 2596-1 : 2014  
CERT NO : PC010953

\* The color shown here are reproduced as close to the original as printing technology allow.



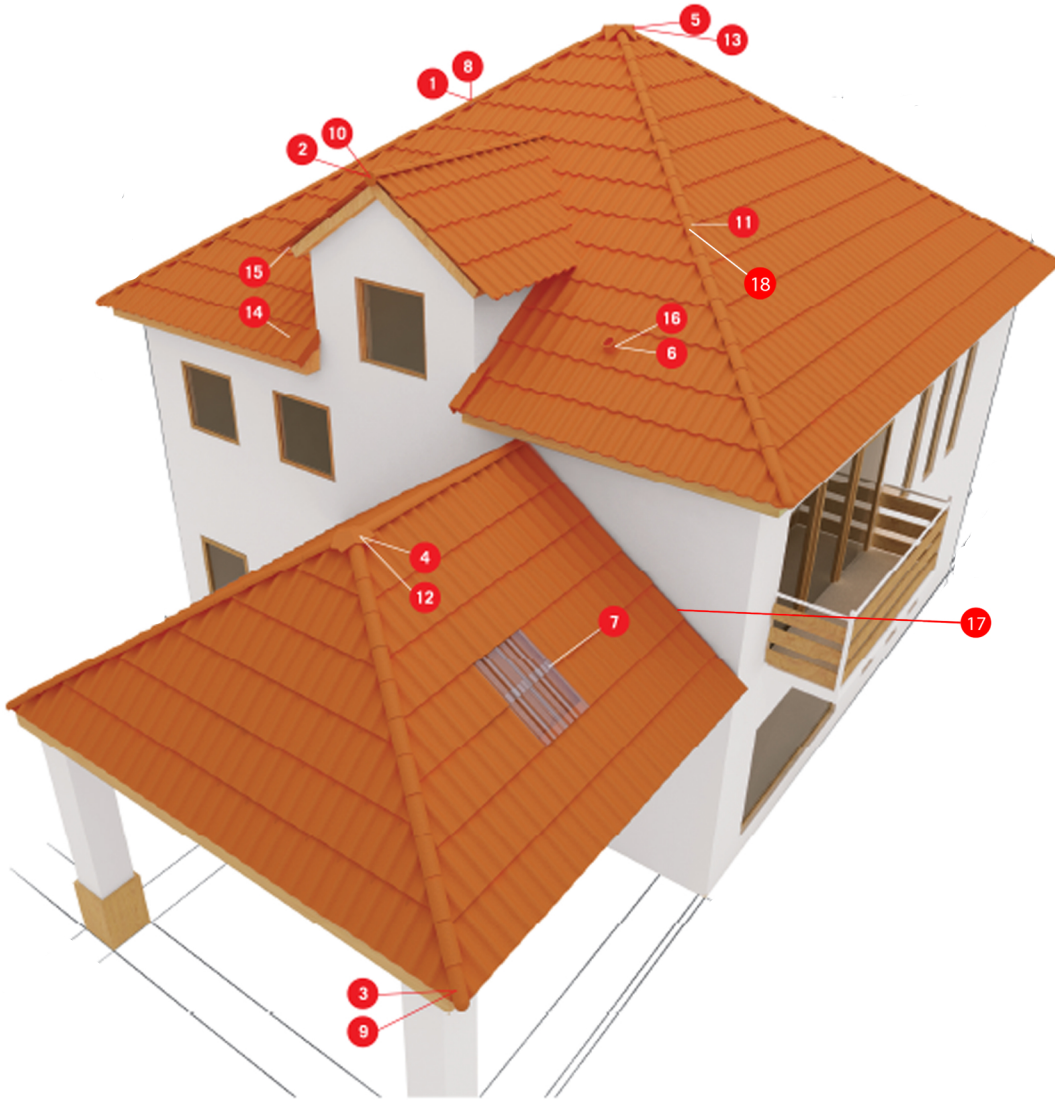

## STANDARD ACCESSORIES



**1**  
STANDARD RIDGE  
( Coverage: 2.60 pcs per metre)



**2**  
STANDARD RIDGE END



**3**  
HIP STARTER



**4**  
3-WAY APEX



**5**  
4-WAY APEX



**6**  
V-PIPE TILE



**7**  
TRANSLUCENT



**17**  
SAGA WALL FLASH  
280mm x 5m(L)



**18**  
SAGA FLEX  
280mm x 10m(L)

# ROUND ACCESSORIES



**8**  
ROUND RIDGE  
(Coverage: 3.38 pcs per lin. meter)



**9**  
ROUND HIP STARTER




**10**  
ROUND RIDGE END



**11**  
2-WAY ROUND RIDGE



**12**  
3-WAY ROUND RIDGE



**13**  
4-WAY ROUND RIDGE



**14**  
VERGE TILE  
(Coverage: 2.90 pcs per lin. meter)



**15**  
VERGE END



**16**  
V-PIPE TILE

# INSTALLATION GUIDE

**Pitch**  
Minimum 20°  
Water proofing & radiant barriers recommended for pitch less than 20°

**Minimum Headlap**  
75mm / 3 inches  
100mm / 4 inches (recommended)

**Coverage**  
9.7 tiles / m<sup>2</sup> - 75mm headlap  
91 tiles / 100sq.ft - 3 inches headlap

10.5 tiles / m<sup>2</sup> - 100mm headlap  
98 tiles / 100sq.ft - 4 inches headlap



**Batten Size**  
50mm x 25mm / 2 inches x 1 inch (minimum)  
for 600mm / 2 ft. centre to centre rafters.

**Batten Spacing**  
345mm / 13.5 inches (maximum) for  
75mm / 3 inches headlap


320mm / 12.5 inches (maximum) for  
100 mm / 4 inches headlap

**Fixing Nail**  
62.5mm / 2.5 inches x 10gm galvanized  
or wire nail recommended. Screws are  
required for metal trusses.

**Tiles Size**  
330mm x 420mm

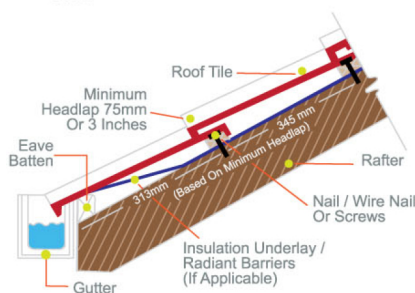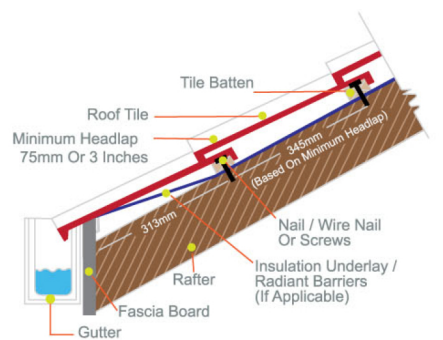

## Wet / Dry Fixing

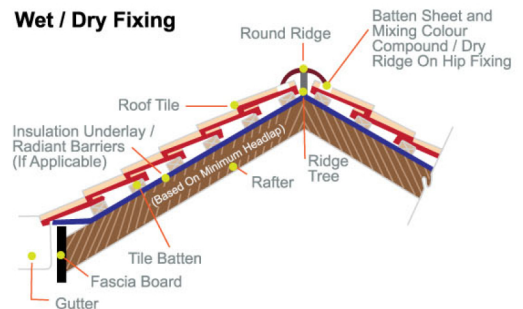

## Wet Fixing

